

Fireplace cassette ARKE 80

KASETA/ARKE/80

ARKE cassette is a closed fireplace type, which is installed in existing open fireplaces or individually installed.



Technical Specifications

Rated output (kW)	12,0
Range of heating power (kW)	6.0 - 16.0
Efficiency (%)	75,0
Exhaust outlet diameter (mm)	200
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	No
Fuel type	recommended seasoned hardwood with moisture $\leq 20\%$
Weight (kg)	132,0
CO emission (at 13% O ₂) \leq given in %	0,10
Flue gas temperature (°C)	320,0
Max log length (cm)	35
Emission of dust (mg/Nm ³)	34,0
Compliance with BlmSchV 2 standard	Yes
The energy efficiency index EEI	98,88
The minimum active field of exhaust grilles (cm ²)	≥ 900
The minimum active field of inlet grilles (cm ²)	≥ 700
Glazing type	straight
Opening of the doors	to the left

Material	steel
Width (cm)	85,00
Height (cm)	61,80
Depth (cm)	47,05
External air inlet	No
The liner of the combustion chamber	Yes
Ashpan	Yes
Decorative printed glass	Yes
Wydajność wentylatorów (m3/h)	280
Rated input power (W)	38
Rated voltage (V)	230

Features

ARKE cassette is a closed fireplace type, which is installed in existing open fireplaces. Its simple and elegant look goes hand in hand with excellent heating parameters. What is more, it has a clean glass system, which along with a separate container, helps to keep it clean.

MAXIMUM USE OF ENERGY

More efficient combustion and longer maintenance of temperature by lining the combustion chamber with ceramic material Acumotte which accumulates heat and raises the temperature in the furnace.

Full combustion on the dust thanks to deflector which extend the exhaust path. This process increases the efficiency of burning and guarantees better energy use. It also minimizes the emission of harmful substances to the atmosphere.

The cassette is equipped with turbines located under the combustion chamber. The device has three levels of fan control. Depending on the choice of one of three options:

Position 0 - the turbines are switched on automatically and operate at reduced speed when the sensor reaches a temperature of 50 ° C. (The sensor is situated below the ash tray in the front of the machine)

Position 1 - turbines operate continuously at reduced speed regardless of the cassette operation,

Position 2 - turbines operate continuously at full speed regardless of the cassette operation.

Turbines are responsible for forcing the air circulation in the unit so that heat is transferred to the environment more efficiently.

Air adjustment - so called "air curtain" is done with a mechanism installed over the inserts door. The opening of the mechanism allows the air to enter the insert into its upper part, where the combustion of gases produced during wood combustion process takes place. This allows to reduce significantly the emission of harmful CO to the atmosphere. Air directed to the slat "sweeps" the glass pushing away the fire and smoke. It significantly reduces the deposition of soot on the glass so it remains clean.

In addition, you can supply air to the fireplace insert from the outside by installing a fresh air inlet. For this purpose, it is **necessary to purchase an inlet stub and a specially adapted ashtray. The possibility of connecting the inlet applies only to fireplace inserts manufactured after May 1, 2018.**

SAFETY ON THE HIGHEST LEVEL

Front of the insert is equipped with a heat resistant ceramic withstanding temperatures up to 800°C. We offered by us glass certified quality and safety.

The body and the front of the insert is resistant to high temperatures through the use of high quality steel.

Excellent tightness thanks to the solid welding made in shielded noble gas. Steel elements are laser cut with the help of modern equipment, and then they are bent on CNC benders.

COMFORTABLE USE

Keeping the insert clean is easier thanks to fitted ash grate and container where ash is accumulated.

Reduced soot deposition through a system of clean glass system (air curtain). Air curtain separates the glass from the chamber thanks of that the glass doesn't become dirty and emit more heat to the room.

MODERN DESIGN


The insert has singular decorative glass thanks to that it looks elegant and modern. Such solution visually enlarges the front of the insert and emphasizes the view of the fire.

The door of the insert has comfortable handle.

ECOLOGICAL COMBUSTION

The unit meets the requirements of **Ecodesign** standards and the restrictions of the **BImSchV 2** standard, which determines the maximum CO emission.

Technical drawing

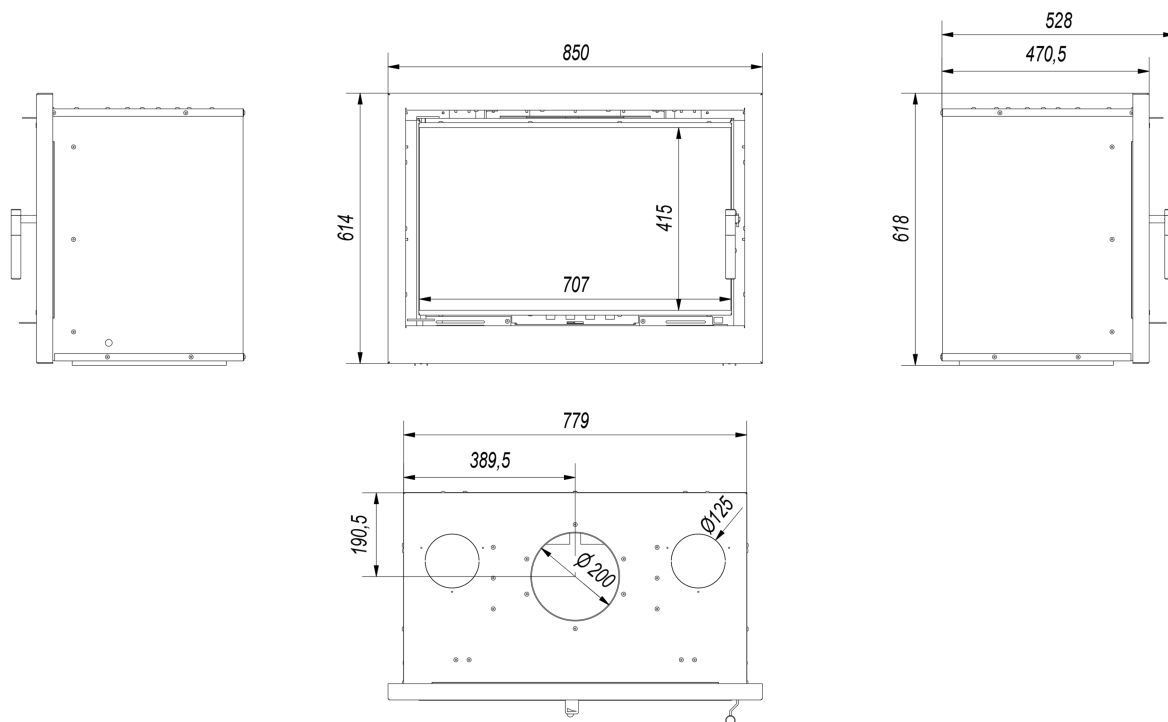


Additional options



External air inlet - additional option

183,00 zł

External air inlet - special connector mounted in fireplace insert, which provides fresh air directly from outside.



Ashtray drawer for ARKE 80

78,00 zł

Ashtray drawer for ARKE 80 cassette.



Steel pipe 200/1m

99,00 zł

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Steel pipe 200/0.5m

68,00 zł

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



Movable elbow 200/90

98,00 zł

Adjustable elbow up to 90°, 3-segment, diameter: 200 mm.



The passage from the pipe system

119,00 zł

Ø 200

The passage from the pipe system to the ceramic chimney Ø200.

Warranty

Wszystkie produkty dostępne na www.kratki.com są fabrycznie nowe, wolne od wad fizycznych i prawnych oraz zostały legalnie wprowadzone na rynek polski. Producent udziela 5 lat gwarancji od momentu zakupu wkładu na jego sprawne działanie. Wyłożenie ceramiczne objęte jest gwarancją na okres 2 lat od momentu zakupu wkładu. Uszczelnienia kominka objęte jest gwarancją na okres 1 roku od momentu zakupu wkładu. Gwarancją nie jest objęta: ceramika żaroodporna.

Zastosowanie wkładu kominkowego, sposób podłączenia do komina oraz warunki eksploatacji muszą być zgodne z instrukcją obsługi.

Return

Klient będący Konsumentem, który zawarł Umowę sprzedaży, może w terminie 14 dni odstąpić od niej bez podawania przyczyny. Bieg terminu na odstąpienie od Umowy sprzedaży rozpoczyna się od chwili objęcia Towaru w posiadanie przez Klienta lub wskazaną przez niego osobę trzecią inną niż przewoźnik. Oświadczenie można złożyć na formularzu, którego wzór został zamieszczony przez Sprzedawcę na Stronie Internetowej Sklepu pod adresem: **formularz odstąpienia**.



Kratki.pl Marek Bal
ul. W. Gombrowicza 4
26-660 Wsola/Jedlińsk

www.kratki.com
+48 48 338 44 88

Date of publication:
28.06.2018