


# Fireplace FRANEK 10

FRANEK/10/PF

The insert with high heating efficiency and characteristic way of space the radiators which enlarge heating surface of the insert.

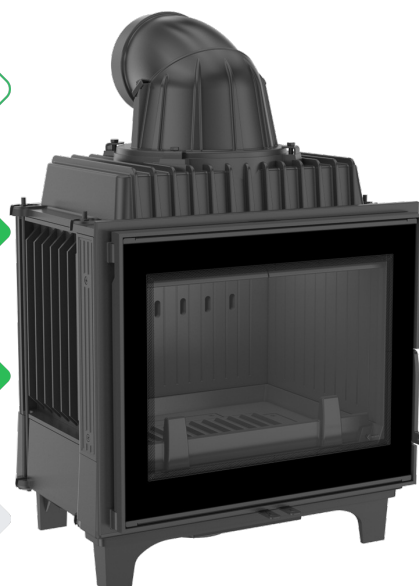

## Technical Specifications

Rated output (kW)	10,0
Range of heating power (kW)	5.0 - 13.0
Efficiency (%)	80,0
Exhaust outlet diameter (mm)	180
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	Yes
Fuel type	recommended seasoned hardwood with moisture $\leq 20\%$
Weight (kg)	190,0
CO emission (at 13% O <sub>2</sub> ) $\leq$ given in %	0,10
Flue gas temperature (°C)	265,0
Max log length (cm)	40
Emission of dust (mg/Nm <sup>3</sup> )	25,0
Compliance with BlmSchV 2 standard	Yes
The energy efficiency index EEI	105,40
The minimum active field of exhaust grilles (cm <sup>2</sup> )	$\geq 700$
The minimum active field of inlet grilles (cm <sup>2</sup> )	$\geq 500$
Glazing type	straight
Opening of the doors	to the left

Material	cast iron
Width (cm)	60,00
Height (cm)	91,40
Depth (cm)	44,50
External air inlet	Yes
The liner of the combustion chamber	No
Ashpan	Yes
Decorative printed glass	Yes

## Features

---

### MAXIMUM USE OF ENERGY

Maximum use of heat due to densely spaced radiators and the wall of the insert made of high quality cast iron with a thickness of 8 mm.

Combustion of fuel particles thanks to deflector, which extends the exhaust gas path.

Triple system of combustion chamber's air venting: primary air - secondary air supplied under the grate through holes in a back wall. Additionally clean glass system designed (air curtain).

Manual control over the combustion process carried out by ash tray regulator.

Air supplied from outside only thanks to built-in an external air inlet fi 125mm.

### SAFETY AT THE HIGHEST LEVEL

Decorative fence helps to maintain the tidiness and protects against falling out of wood.

### ECOLOGICAL COMBUSTION

The unit meets the requirements of **Ecodesign** standards and the restrictions of the **BlmSchV 2** standard, which determines the maximum CO emission.

### CONVENIENT TO USE

Large combustion chamber, which allows to load a large quantity of fuel without the need for frequent refills.

Reduced soot deposition through a system of pure glass (air curtain).

Movable, two-piece cast iron fumes outlet with the 360 regulation which can be directed upward or backward.


Movable two-piece cast iron grate.

## MODERN DESIGN

Decorative, heat-resistant glass that can withstand temperatures up to 800oC. It gives a fireplace a modern and elegant look, visually enlarges the front of the insert.

## Technical drawing

---

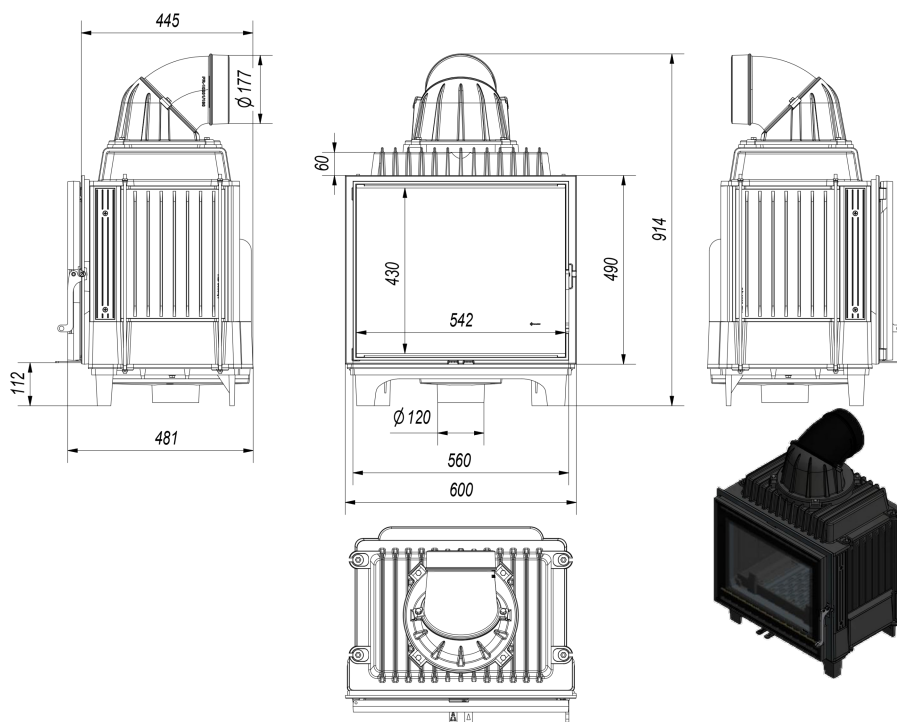

## Additional options

---



### Base for insert FRANEK 10

240,00 zł

The base for the insert FRANEK 10 allows stable positioning of the fireplace insert. The height of the base is adjustable.



### Steel pipe 180/1m

95,00 zł

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



### Steel pipe 180/0.5m

63,00 zł

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



### Movable elbow 180/90

94,00 zł

Adjustable elbow up to 90°, 3-segment, diameter: 180 mm.



### The passage from the pipe system

119,00 zł

Ø 180

The passage from the pipe system to the ceramic chimney Ø180.



### The passage from the reduction from the pipe system Ø 180/200

120,00 zł

The passage from the pipe system to the ceramic chimney Ø 180/200.

## Warranty

---

Wszystkie produkty dostępne na [www.kratki.com](http://www.kratki.com) są fabrycznie nowe, wolne od wad fizycznych i prawnych oraz zostały legalnie wprowadzone na rynek polski. Producent udziela 5 lat gwarancji od momentu zakupu wkładu na jego sprawne działanie. Ruszt i uszczelnienia kominka objęte są gwarancją na okres 1 roku od momentu zakupu wkładu. Gwarancją nie jest objęta: ceramika żaroodporna. Zastosowanie wkładu kominkowego, sposób podłączenia do komina oraz warunki eksploatacji muszą być zgodne z instrukcją obsługi.

## Return

---

Klient będący Konsumentem, który zawarł Umowę sprzedaży, może w terminie 14 dni odstąpić od niej bez podawania przyczyny. Bieg terminu na odstąpienie od Umowy sprzedaży rozpoczyna się od chwili objęcia Towaru w posiadanie przez Klienta lub wskazaną przez niego osobę trzecią inną niż przewoźnik. Oświadczenie można złożyć na formularzu, którego wzór został zamieszczony przez Sprzedawcę na Stronie Internetowej Sklepu pod adresem: **formularz odstąpienia**.



Kratki.pl Marek Bal  
ul. W. Gombrowicza 4  
26-660 Wsola/Jedlińsk

[www.kratki.com](http://www.kratki.com)  
+48 48 338 44 88

Date of publication:  
28.06.2018